




GALEKOVIĆ

quality in tradition

CATALOGUE

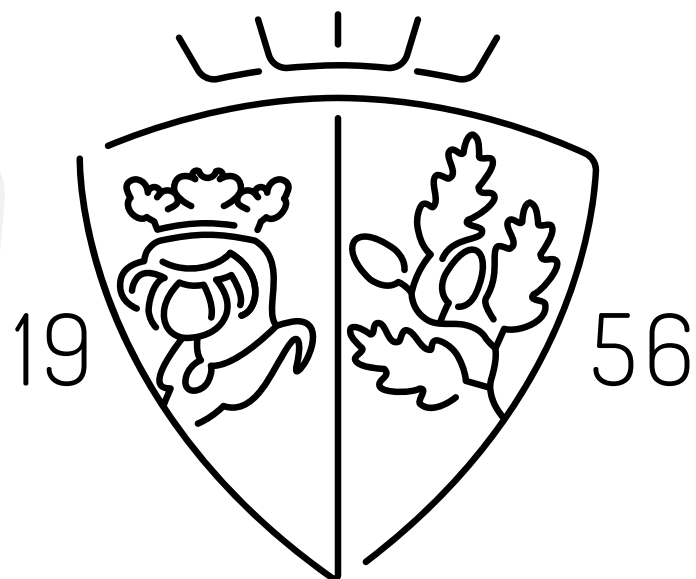

In his lifetime a man walks
an average of **200 million steps**,
treat your steps with
the best flooring.



Braće Radića 199a, 10410 Velika Gorica (Mraclin), Croatia
+385 1 5590 840 | prodaja@pps-galekovic.hr | galekovic.hr

TABLE OF CONTENT

SOLID FLOORING	04
ENGINEERED FLOORING	08
CHEVRON & HERRINGBONE	14
DECKING	19
FACADE	22
COLORS	24
CERTIFICATES	25



SOLID FLOORING



DUX

THICKNESS // 10;14 mm

WIDTH // 50;70 mm

LENGTH // 350-600 mm

FINISH // LAK / VARNISH

WOOD TYPE //

OAK

ASH

THERMO ASH

BEECH

THERMO BEECH

CHERRY

HORNBEAM



DOMINUS

THICKNESS // 14 mm

WIDTH // 90 mm

LENGTH // 450-1200 mm

FINISH // **VARNISH / OIL / BRUSHING**

WOOD TYPE //

OAK

THERMO OAK

ASH

THERMO ASH


BEECH

THERMO BEECH

CHERRY

HORNBEAM

THERMO HORNBEAM

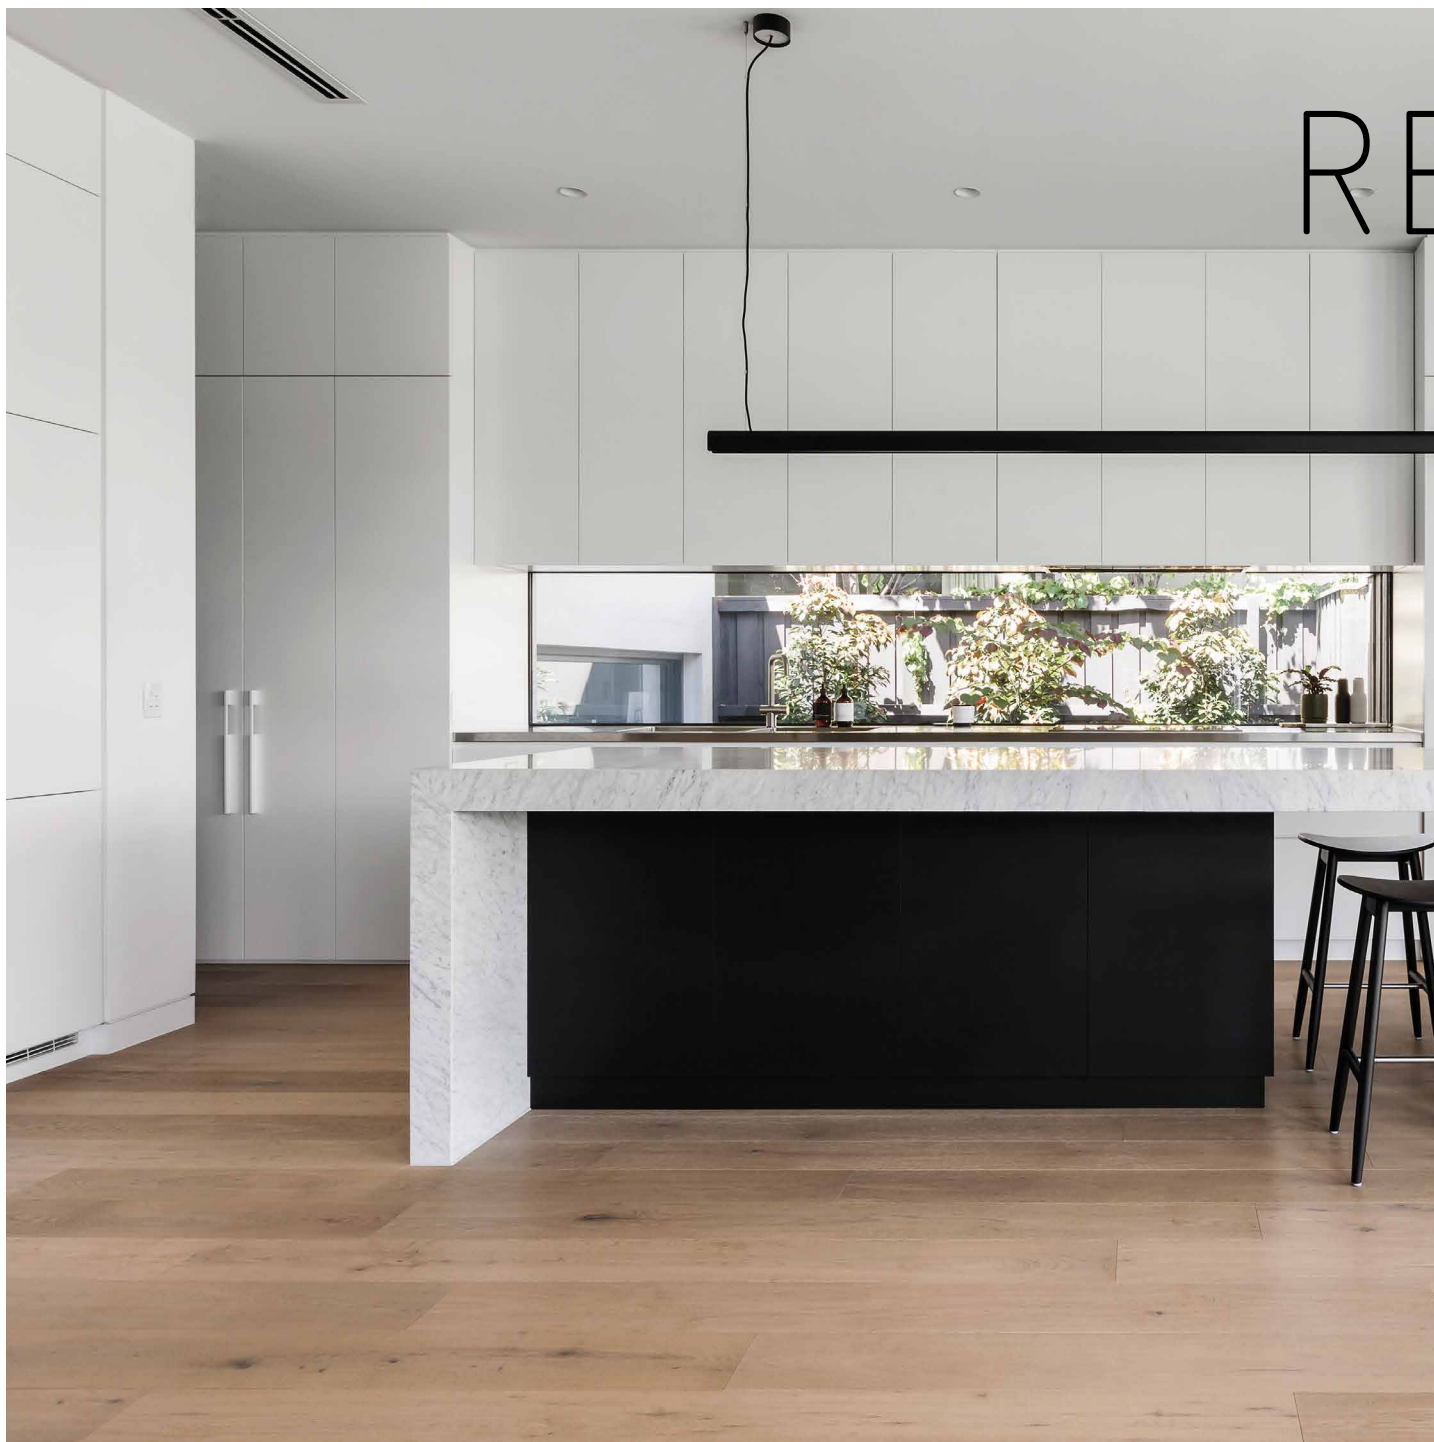

REGIUS

THICKNESS // 14;21 mm

WIDTH //

120;140;160 mm (14 mm)

120;140;160;180;200 mm (21 mm)

LENGTH // 400-2400 mm

FINISH // VARNISH / OIL / BRUSHING

WOOD TYPE

OAK

THERMO OAK

ASH

THERMO ASH

BEECH

THERMO BEECH

HORNBEAM


THERMO HORNBEAM



ENGINEERED FLOORING

ENGINEERED FLOORS WITH HIGH QUALITY HARDWOOD TOP LAYER
GLUED TO A PLYWOOD OR 2 LAYER SOLID WOOD BASE

MULTILAYER FLOORING

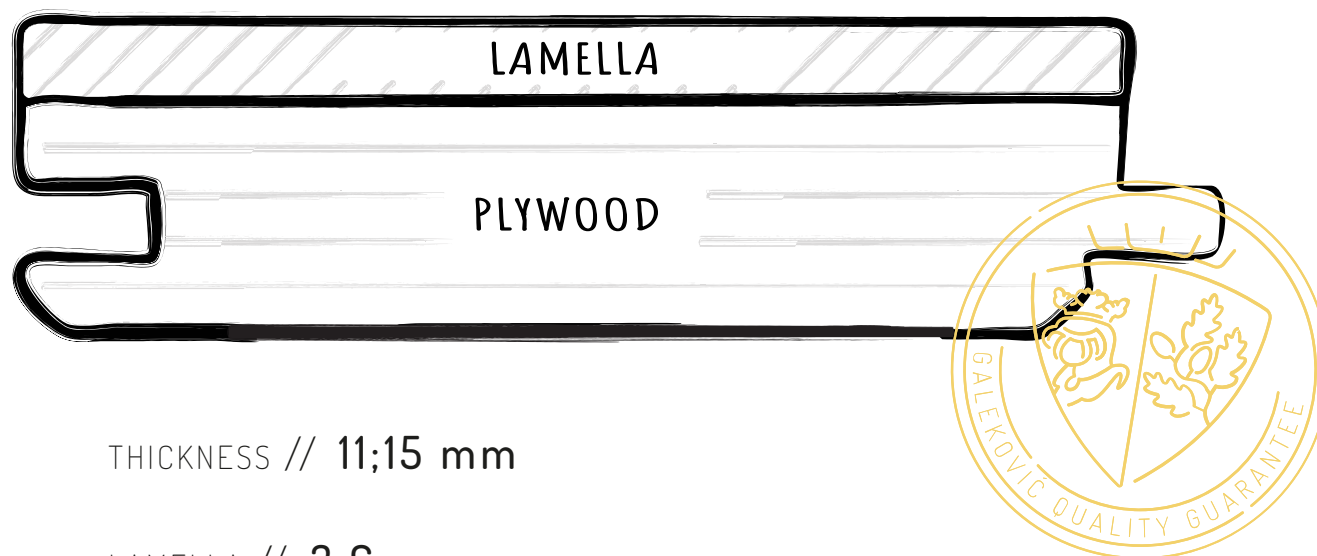


THICKNESS // 11;15 mm

LAMELLA // 3,6 mm

WIDTH // 120;140;160;180;200;220 mm

THREE-LAYER FLOORING

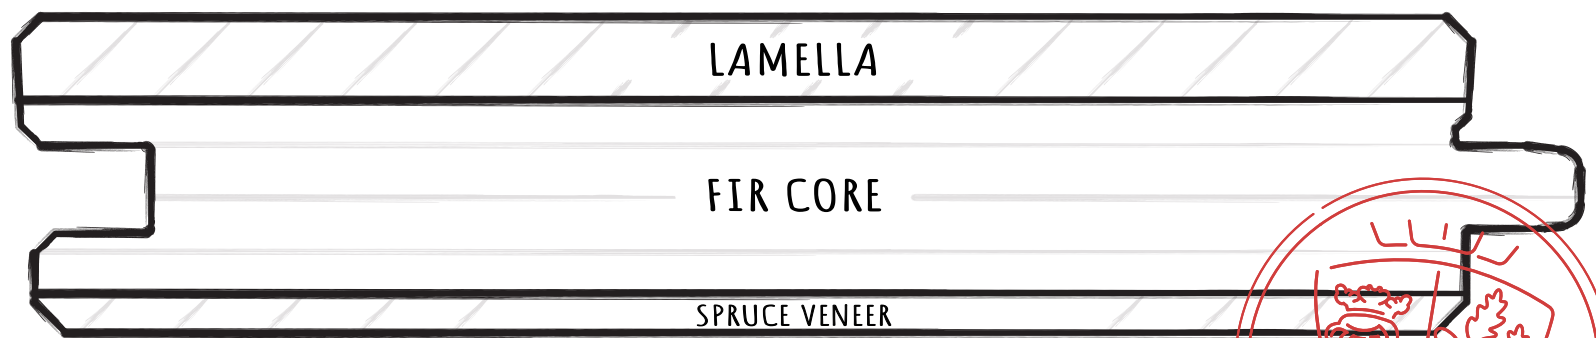

THICKNESS // 14,5 mm

LAMELLA // 3,6 mm

WIDTH // 120;140;160;180;200;220 mm





REGULAR

THICKNESS //

MULTILAYER FLOORING 11;15 mm

THREE-LAYER FLOORING 14,5 mm

WIDTH //

120;140 mm

LENGTH //

400-2200 mm

STYLISH

THICKNESS //
MULTILAYER FLOORING 15 mm
THREE-LAYER FLOORING 14,5 mm

WIDTH // 160 mm

LENGTH // 600-2400 mm





ELEGANCE

THICKNESS //

MULTILAYER FLOORING 15 mm

THREE-LAYER FLOORING 14,5 mm


WIDTH // 180;200;220 mm

LENGTH // 600-2400 mm




CHEVRON & HERRINGBONE

WIDE OPTIONS OF SOLID AND
ENGINEERED FLOORING

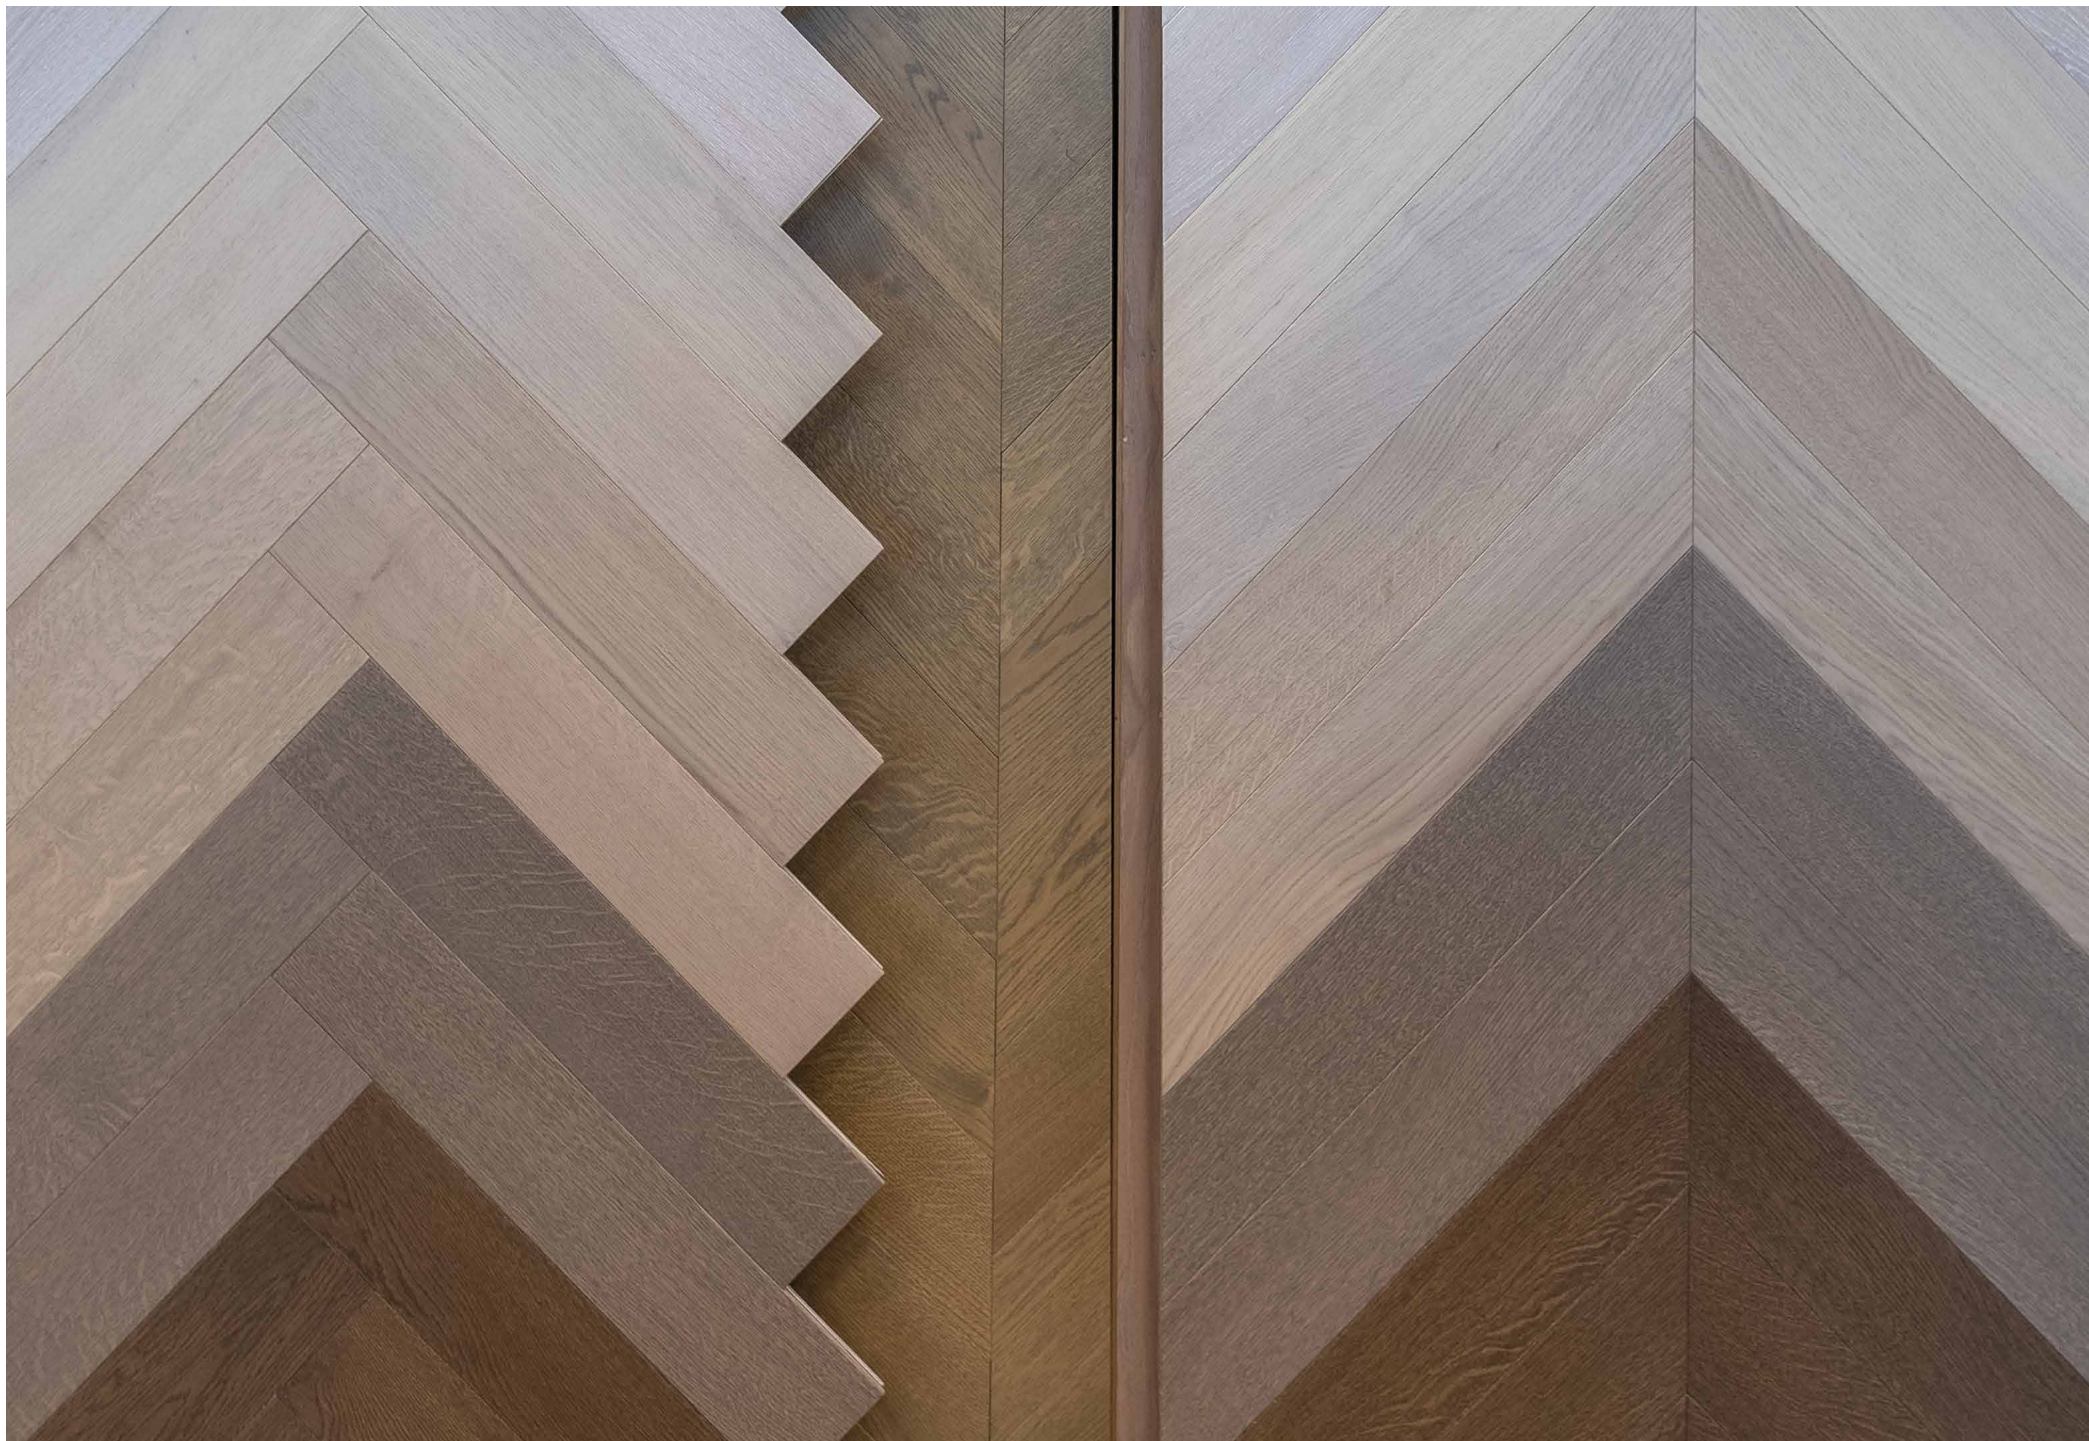

HERRINGBONE

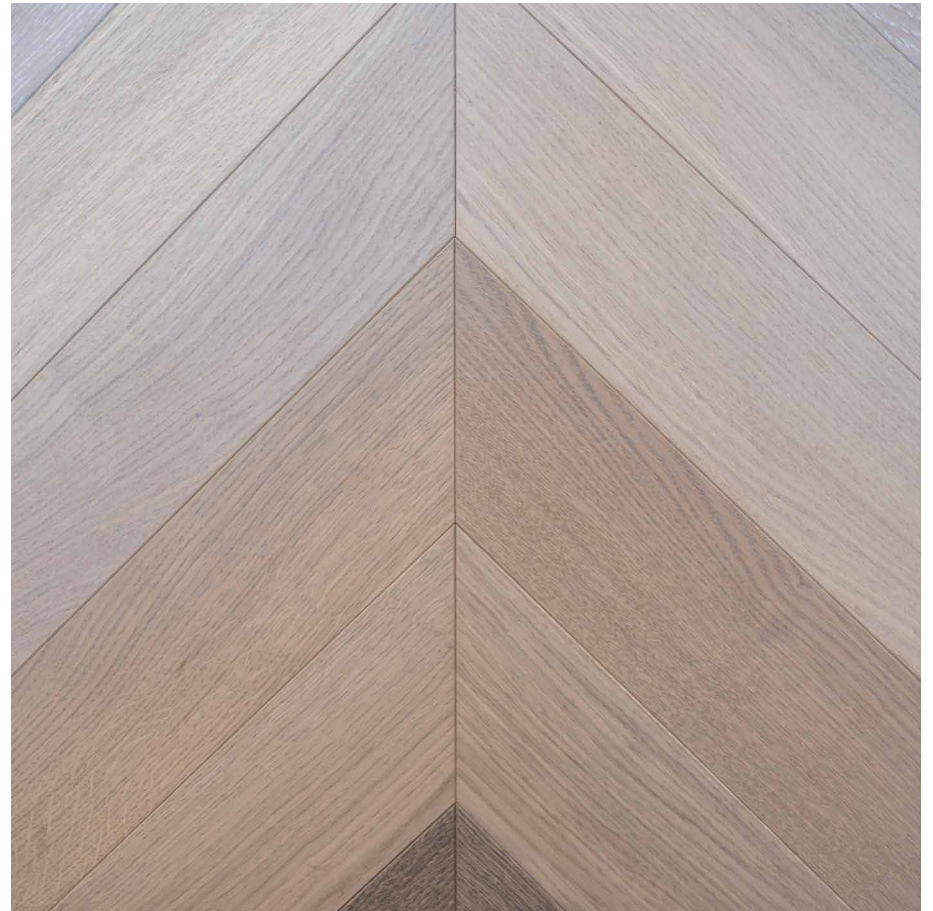

CHEVRON

CHEVRON

SOLID PARQUET

THICKNESS // 14 mm
WIDTH // 50-140 mm
ANGLE // 45°;60°

MULTILAYER FLOORING

THICKNESS // 15 mm
WIDTH // 120-140 mm
ANGLE // 45°;60°

HERRINGBONE

SOLID PARQUET

THICKNESS // 14 mm

WIDTH // 50-140 mm

LENGTH // 400;600;900;1200 mm

MULTILAYER FLOORING

THICKNESS // 11;15 mm

WIDTH // 120;140;180;200 mm


LENGTH // 400;600;900;1200 mm

THREE-LAYER FLOORING

THICKNESS // 14,5 mm

WIDTH // 120;140;180;200 mm

LENGTH // 600;900;1200 mm

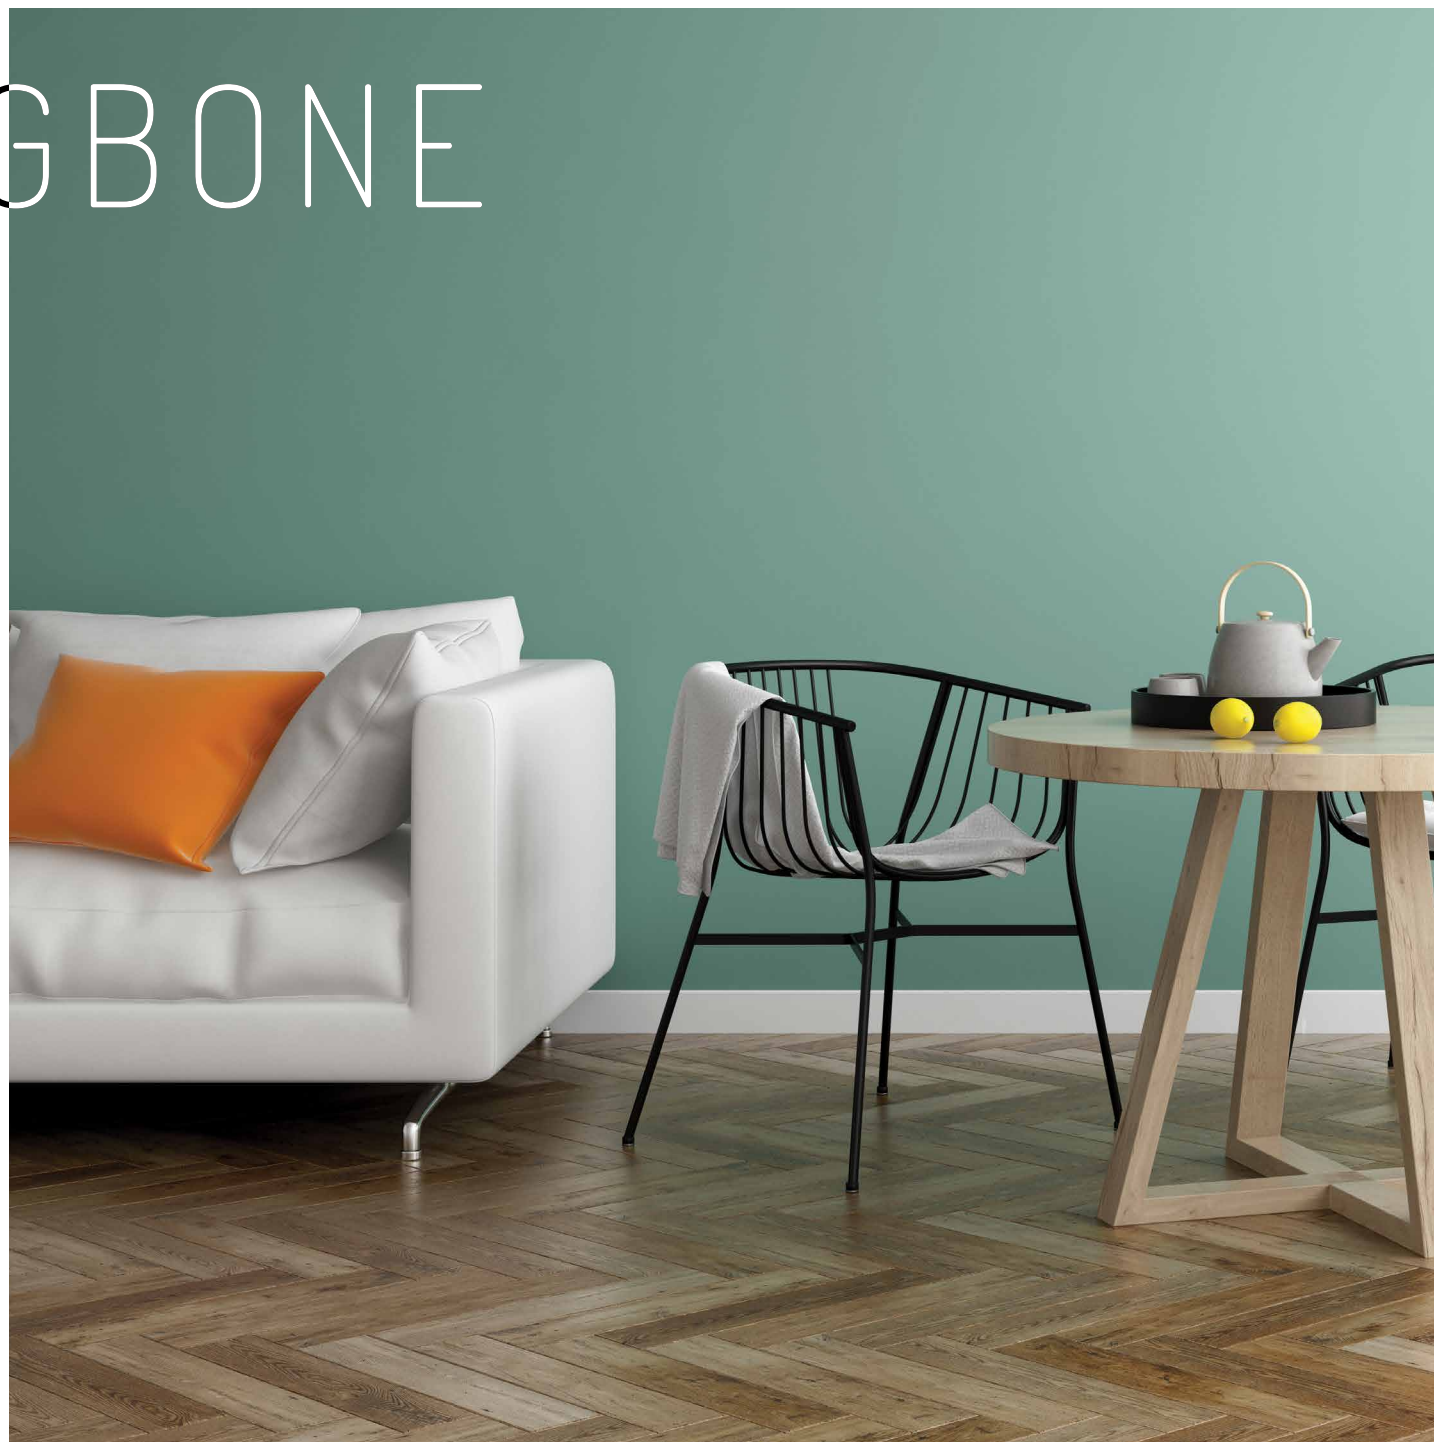



DECKING

THERMALLY PROCESSED 21 MM THICK ASH (CONTROLLED PYROLYSIS AT 200°C)

DECKING ON A PLASTIC BASE

CHESS: LAYING SEGMENTS IN A PATTERN SIMILAR TO A CHESSBOARD.

LONGITUDINAL: LAYING THAT FOLLOWS STRAIGHT LINES.



THICKNESS // 30 mm

WIDTH // 550 mm

LENGTH // 550 mm

WOOD TYPE // THERMO ASH

SURFACE //
POSSIBLE CHOICE OF RIBBED
(ANTI-SLIP) OR SMOOTH SURFACE

DECKING BARCODE

THE SET CONTAINS 3 WOODEN SEGMENTS
WITH DIFFERENT LENGTHS.

EASY INSTALLATION ON A PREPARED BASE.



SEGMENT THICKNESS // 50 mm (INCLUDES A
WOODEN SUBSTRUCTURE WITH RUBBER PLUGS)

SEGMENT WIDTH // 710 mm

SEGMENT LENGTH // 300;600;900 mm

WOOD TYPE // THERMO ASH

DECKING „DECK“

THICKNESS // 21 mm

WIDTH // 90;120;140 mm

LENGTH // 900-2400 mm

FINGER JOINTED 3000≤ (120;140 mm)

WOOD TYPE // THERMO ASH


SURFACE // POSSIBLE CHOICE OF RIBBED
(ANTI-SLIP) OR SMOOTH SURFACE





FACADE

THERMALLY PROCESSED 21 MM THICK ASH (CONTROLLED PYROLYSIS AT 200°C)

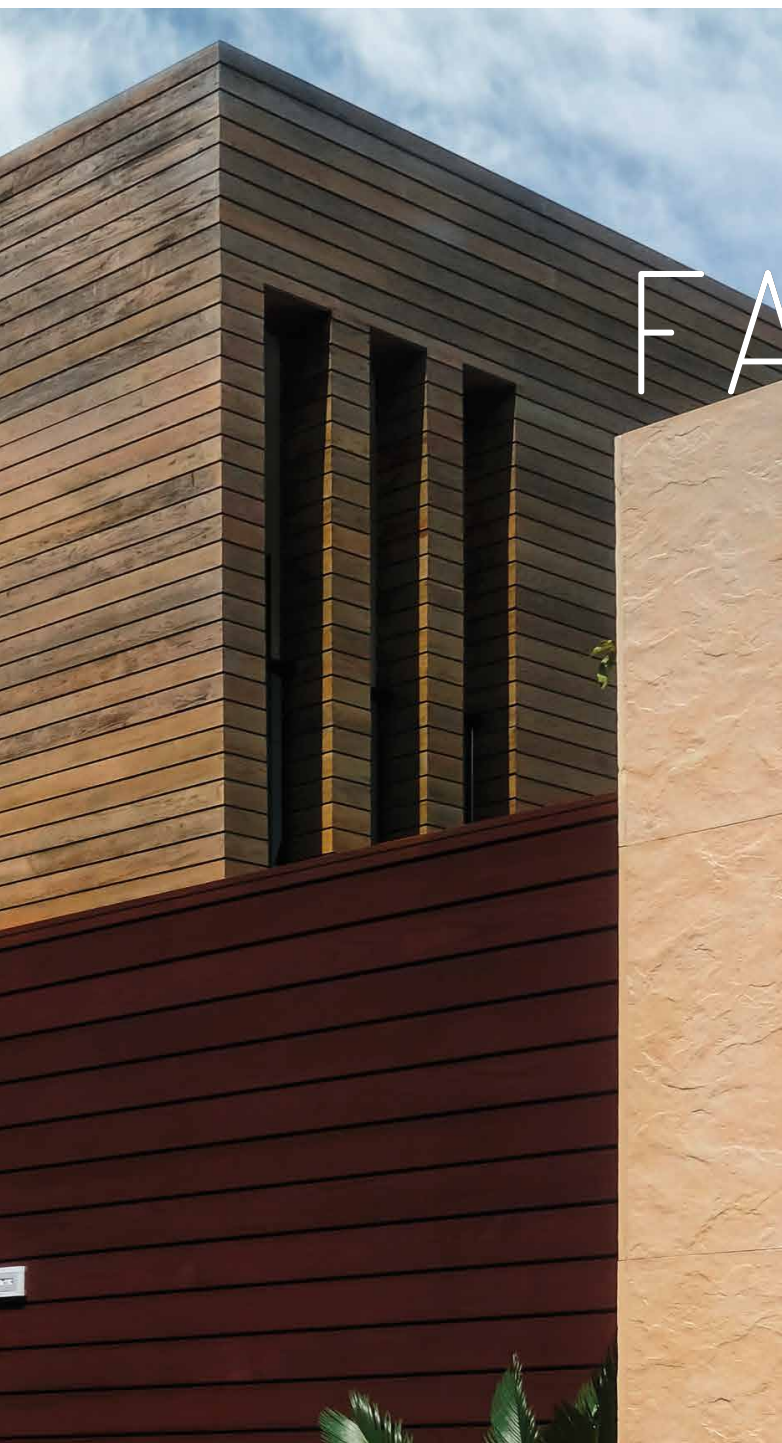

FACADE

THICKNESS // 21 mm

WIDTH // 90;120;140 mm

LENGTH // 900-2400 mm

FINGER JOINTED 3000≤ (120;140 mm)

WOOD TYPE // THERMO ASH

COLORS


Varnish:




Oil:




Ash:

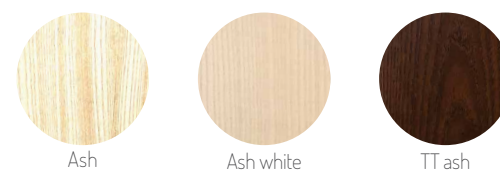

CERTIFICATES



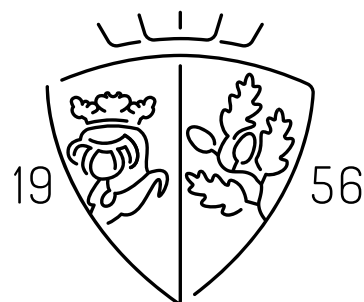

GALEKOVIČ
quality in tradition

Braće Radića 199a
10410 Velika Gorica (Mraclin)
Croatia

Tel: +385 1 5590 840

prodaja@pps-galekovic.hr
galekovic.hr

